TADANO

TECHNICAL DATA | IMPERIAL

eAA-22C

ARTICULATED CRAWLER BOOM

OUR TRUE MISSION
ZERO EMISSIONS

MODEL HIGHLIGHTS

- Zero emission – electric drive
- Low ground pressure
- Non-marking rubber tracks
- AGM maintenance free batteries
- Indoor and outdoor performance
- 360° turntable rotation

eAA-22C Range of motion

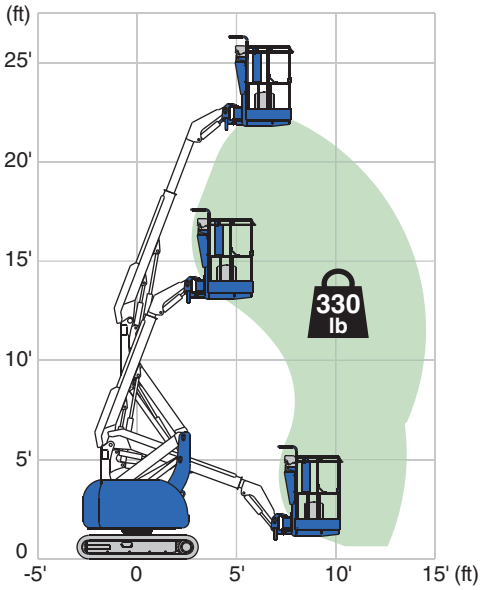

Model	eAA-22C
Max. platform capacity	330 lb
Platform size	3‘0.2“ x 2‘5“ x 3‘7.3“
Max. work height	28‘4“
Max. outreach	14‘9“

Extended battery performance, compact crawler engineered for indoor, underground and urban construction applications. We know Crawlers!

TADANO

Model	eAA-22C

SPECIFICATIONS	
Max. work height	28‘4“
Max. platform height	22‘4“
Max. outreach	14‘9“
Allowable tilt	5°
Max. platform capacity	330 lb
Platform size (L x W x H)	3‘0.2“ x 2‘5“ x 3‘7.3“
Platform rotation	130° – L90° ~ R40°
Transport dims (L x W x H)	13‘4.6“ x 5‘5“ x 6‘6.5“
Machine weight	6,040 lb

TRAVEL	
Max. travel speed	1.37 mph
Travel position ground pressure	5.66 psi
Max. gradeability	42 %

POWER SOURCE	
Power	Electric, AGM battery
Capacity	260 Ah
System voltage	8 x 6 V

OPTIONS
LED lighting*

SAFETY DEVICES	
Emergency stop	✔
Foot switch / Enabling switch	✔
Auxiliary lowering control	✔
Traveling restriction (on slope)	✔
Operation restriction (on slope)	✔
Battery isolator switch	✔

* rear and upper control box only

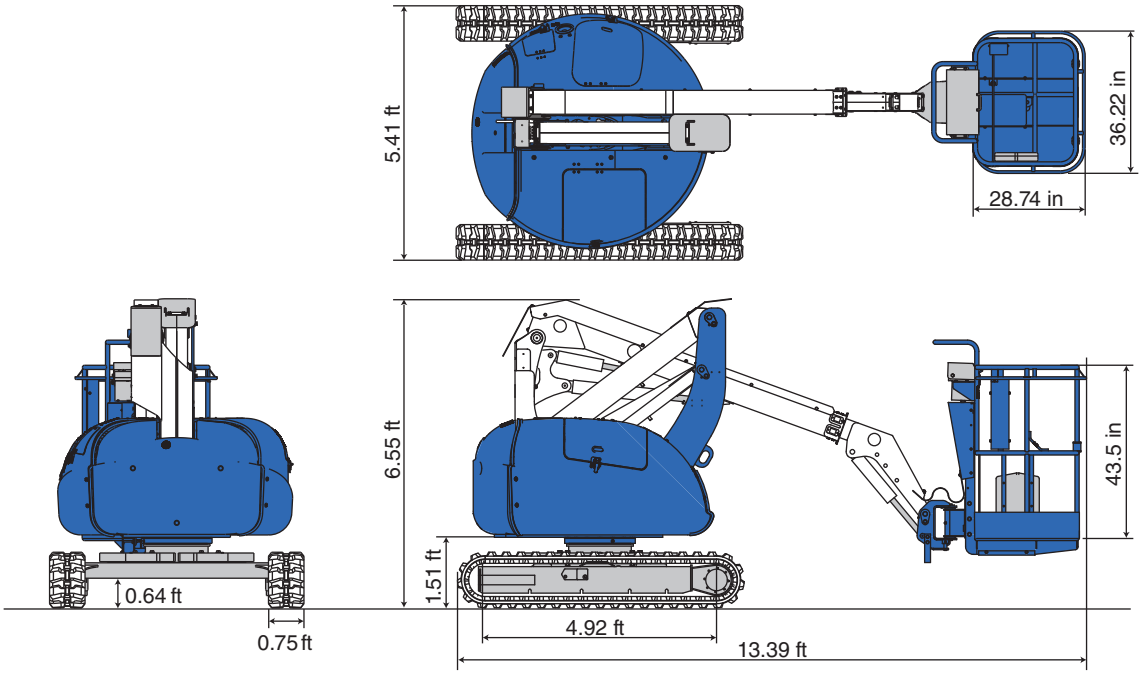

For all our types:

December 2025. Unless otherwise specified, all information in this brochure refers to a standard equipment, and it is intended as general information only. No liability is assumed. Errors reserved. Product specifications and prices are subject to changes without notice. The photographs and/or drawings in this brochure are for illustrative purposes only. For correct and safe operation, the original operating manual and lifting capacity charts are essential. Failure to follow the corresponding Operator’s Manual when using our equipment or failure to otherwise act responsibly may result in property damage, serious injury or death. The sole warranty applicable with respect to our equipment is the standard warranty as per general terms and conditions of sales and service (ask your local Tadano dealer for details), and Tadano makes no other warranty, express or implied. All rights reserved. Any use of the trademarks, logos, brand names and model names used herein is prohibited.

© Tadano Ltd. 2025

Tadano Ltd.
Kanda Square 18th Floor, 2-2-1 Kanda-Nishikicho, Chiyoda-ku, Tokyo 101-0054, Japan
Phone: +81-3-6811-7309 (International Division)

Tadano America Corporation
4242 West Greens Road, Houston, TX 77066, Phone: +1 (281) 869-0030 · Fax: +1 (281) 869-0040

tac.sales@tadano.com
www.tadano.com